



**EEEEASILY  
MORE.**

**Excellent. Efficient. Expert.**

The value-added modules of the IBC SOLAR Line.  
**IBC MonoSol 330, 335, 340 MS-HC**

First-class solar modules made of monocrystalline half-cut-cells



25 year linear power and  
15 year product warranty<sup>1</sup>



Positive power tolerance (-0/+3%)



Increased mechanical stability (5400 Pa)



German warrantor



100% tested quality



Improved shadowing management  
thanks to half-cut-technology

**IBC SOLAR – your partner for energy solutions**

IBC SOLAR AG has had a successful presence in the photovoltaic market for **more than 35 years** and is one of the leading international energy companies providing high-performance system solutions in every size and for every application with intelligent photovoltaic systems. The **economic strength and financial independence** is confirmed by globally recognised rating agencies.

Smart Systems for Solar Power thanks to perfectly matched components. **More than 1,000 highly qualified partners** around the world, as well as **more than 4,200 megawatts of installed power**, which supply **around 2 million people with solar power**, underline the high level of expertise of IBC SOLAR.

**IBC SOLAR – leading PV system integrator from Germany since 1982!**



**Engineered  
GERMANY**

The ideal solution for:



## TECHNICAL DATA

IBC MonoSol	330 MS-HC	335 MS-HC	340 MS-HC
Article number	2002800029 2002800030 2002800041	2002800024 2002800027	2002800025 2002800028
<b>Electrical data (STC):</b>			
STC Power Pmax (Wp)	330	335	340
STC Nominal Voltage Umpp (V)	33.8	34.0	34.2
STC Nominal Current Imp (A)	9.77	9.86	9.95
STC Open Circuit Voltage Uoc (V)	41.3	41.5	41.7
STC Short Circuit Current Isc (A)	10.61	10.73	10.82
Module Efficiency (%)	19.6	19.9	20.1
Power Tolerance (Wp)	-0/+3%	-0/+3%	-0/+3%

<b>Electrical data (NOCT):</b>			
800 W/m <sup>2</sup> NOCT AM 1.5 Power Pmax (Wp)	266.45	270.18	273.48
800 W/m <sup>2</sup> NOCT AM 1.5 Nominal Voltage Umpp (V)	33.9	34.2	34.1
800 W/m <sup>2</sup> NOCT AM 1.5 Open Circuit Voltage Uoc (V)	41.0	41.2	41.3
800 W/m <sup>2</sup> NOCT AM 1.5 Short Circuit Current Isc (A)	8.25	8.29	8.44
Relative Efficiency Reduction at 200 W/m <sup>2</sup> (%)	3.0	3.0	3.0

<b>Temperature coefficient:</b>			
NOCT (°C)	45	45	45
Tempcoeff Isc (%/°C)	+0.048	+0.048	+0.048
Tempcoeff Voc (mV/°C)	-115.64	-116.20	-116.76
Tempcoeff Pmpp (%/°C)	-0.36	-0.36	-0.36


<b>Operating conditions:</b>	
Max. System Voltage (V)	1500
Application Class	A
Reverse Current Ir (A)	20
Current value string fuse (A)	15
Fuse protection from parallel strings	3

<b>Mechanical properties:</b>	
Dimensions (L x W x H in mm)	1684 x 1002 x 40
Weight (kg)	19.0
Max. Test load, Push/Pull (Pa)	5400/2400
Max. Design load <sup>2</sup> , Push/Pull (Pa)	3600/1600
Front sheet (mm)	3.2 (low-iron photovoltaic glass and anti-reflective coating)
Frame	anodized aluminium, sturdy hollow-chamber frame
Cells	12 x 10 mono-crystalline silicon cells
Connection type	EVO2

<b>Warranties and certification:</b>	
Product warranty	15 years <sup>1</sup>
Power warranty	25 years, linear <sup>1</sup>
Certification	IEC 61215, IEC 61730-1/-2, ISO 9001, ISO 14001, OHSAS 18001


<b>Packaging information:</b>	
Number of modules per pallet	26
Number of pallets per 40' container	26
Dimensions incl. pallet (L x W x H in mm)	1729 x 1105 x 1170
Gross weight incl. double pallet (kg)	537
Stackability per pallet	3-fold

## 25 year linear power warranty by IBC SOLAR

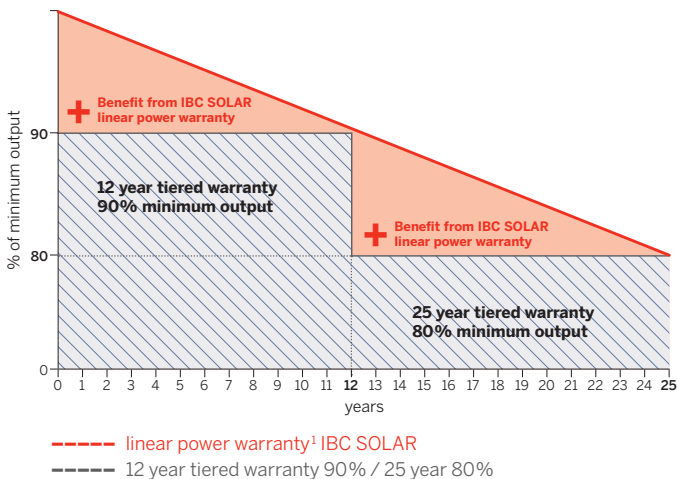

<sup>1</sup> The linear power and product warranty are only valid for installations within Europe and Japan. The warranty requires installation according to the valid installation instructions. Standard test conditions: 1000 W/m<sup>2</sup> irradiation with a spectral distribution of AM1.5 and a cell temperature of 25°C. 800 W/m<sup>2</sup>, NOCT. Information according to EN60904-3 (STC). All values according to DIN EN 50380. Errors and changes reserved.  
The precise conditions and content can be taken from the respectively valid version of the product and power warranty, which you can obtain from your IBC Premium Partner.

<sup>2</sup> Loads according to IEC 61215-2:2016, max. design load

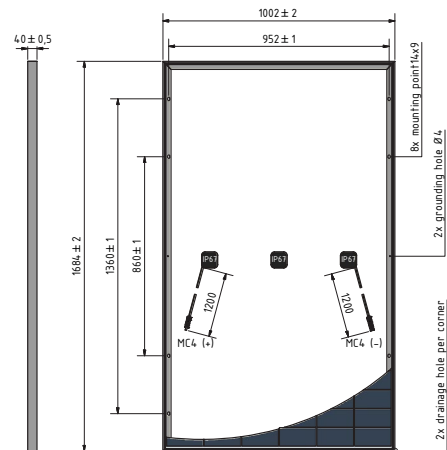

Presented by: